

+

A

12/13/99

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	862.3166
First Named Inventor or Application Identifier	
TAKASHI TSUNODA	
Express Mail Label No.	

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

<input checked="" type="checkbox"/>	Fee Transmittal Form (Submit an original, and a duplicate for fee processing)	
<input checked="" type="checkbox"/>	Specification	Total Pages <b>54</b>
<input checked="" type="checkbox"/>	Drawing(s) (35 USC 113)	Total Sheets <b>12</b>
<input checked="" type="checkbox"/>	Oath or Declaration	Total Pages <b>1</b>
<input checked="" type="checkbox"/>	Newly executed (original or copy)	
<input type="checkbox"/>	Unexecuted for information purposes	
<input type="checkbox"/>	Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) <b>[Note Box 5 below]</b>	
<input type="checkbox"/>	DELETION OF INVENTOR(S) Signed Statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	
<input type="checkbox"/>	Incorporation By Reference (useable if Box 4c is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4c, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	

6. <input type="checkbox"/>	Microfiche Computer Program (Appendix)
7. <input type="checkbox"/>	Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
a. <input type="checkbox"/>	Computer Readable Copy
b. <input type="checkbox"/>	Paper Copy (identical to computer copy)
c. <input type="checkbox"/>	Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. <input checked="" type="checkbox"/>	Assignment Papers (cover sheet & document(s))	
9. <input type="checkbox"/>	37 CFR 3.73(b) Statement (when there is an assignee)	<input type="checkbox"/> Power of Attorney
10. <input type="checkbox"/>	English Translation Document (if applicable)	
11. <input type="checkbox"/>	Information Disclosure Statement (IDS)/PTO-1449	<input type="checkbox"/> Copies of IDS Citations
12. <input type="checkbox"/>	Preliminary Amendment	
13. <input checked="" type="checkbox"/>	Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
14. <input type="checkbox"/>	Small Entity	<input type="checkbox"/> Statement filed in prior application Statement(s) Status still proper and desired
15. <input type="checkbox"/>	Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input type="checkbox"/>	Other:	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No. _____
---------------------------------------	-------------------------------------	---	--------------------------------

## 18. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label	<b>05514</b> (Insert Customer No. or Attach bar code label here)	or <input type="checkbox"/> Correspondence address below
---	---	--

NAME			
Address			
City	State	Zip Code	
Country	Telephone	Fax	

12/13/99  
J-688 U.S. PTO  
09/459644

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	30-20 =	10	X \$ 18.00 =	\$ 180.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	12-3 =	9	X \$ 78.00 =	\$ 702.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$ 260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
				Total of above Calculations = \$1642.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1642.00

## 19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$1642.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Scott D. Malpede - Reg. No. 32,533
SIGNATURE	
DATE	December 13, 1999

SDM/lmj

TITLE OF THE INVENTION  
DISPLAY DEVICE, DISPLAY CONTROL METHOD THEREOF, AND  
STORAGE MEDIUM

5 BACKGROUND OF THE INVENTION

The present invention relates to a display device and its display control method, and a storage medium and, more particularly, to a display device having display means capable of displaying a plurality of windows on a display screen, its display control method, and a storage medium.

Conventionally, in a computer which is used by connecting a display device or has a built-in display device, an OS having a multi-window function capable of displaying a plurality of windows on a single large and high-definition display screen is used. When a plurality of windows are displayed on a single display screen, a cursor that moves on the display screen in accordance with operation of a pointing device such as a mouse or the like is moved onto a desired window to set that window active (i.e., to indicate the window accessed), and a data process on the window which is active (to be referred to as an active window hereinafter) is made.

However, when a plurality of windows are opened in turn, it gradually becomes hard for the user to tell which window is currently active. In order to confirm in

practice whether or not the window of interest is active, the user must intentionally move the cursor to that, and then click a button provided to the pointing device at that position, resulting in troublesome operation.

- 5           When a plurality of windows are simultaneously opened, and moving images are displayed on all these windows, the user may fail to determine which window he or she should look at. Even if this does not happen, if there is a window with quicker motion than the moving  
10 image of interest, user's attention may be attracted to that window, and he or she may fail to focus on the window of his or her choice.

#### SUMMARY OF THE INVENTION

- 15           The present invention has been made in consideration of the aforementioned problems, and has as its object to provide a display device which can clearly indicate the window which is currently active even when a plurality of windows are opened, its display control  
20 method, and a storage medium.

In order to achieve the above object, a display device according to the present invention comprises the following arrangement.

- That is, there is provided a display device  
25 capable of displaying a plurality of windows on a display screen, comprising:

discrimination means for discriminating if image data to be displayed on each of the plurality of windows is image data to be displayed on an active window; and display control means for controlling display of image data to be displayed on each of the plurality of windows on the basis of a discrimination result of the discrimination means.

In order to achieve the above object, a display control method for a display device according to the present invention comprises the following arrangement.

That is, there is provided a display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:  
the discrimination step of discriminating if image data to be displayed on each of the plurality of windows is image data to be displayed on an active window; and  
the display control step of controlling display of image data to be displayed on each of the plurality of windows on the basis of a discrimination result in the discrimination step.

In order to achieve the above object, a storage medium according to the present invention comprises the following arrangement.

That is, there is provided a storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or

incorporates a display device capable of displaying a plurality of windows on a display screen, the program comprising:

- the discrimination step of discriminating if image  
5 data to be displayed on each of the plurality of windows  
is image data to be displayed on an active window; and  
the display control step of controlling display of  
image data to be displayed on each of the plurality of  
windows on the basis of a discrimination result in the  
10 discrimination step.

In order to achieve the above object, a display device according to the present invention comprises the following arrangement.

- That is, there is provided a display device  
15 capable of displaying a plurality of windows on a  
display screen, comprising:

- input means for inputting display data;  
first storage means for storing the input display  
data;  
20 second storage means for storing the display data  
output from the first storage means;  
display means for displaying the display data  
stored in the second storage means at a predetermined  
luminance;

detection means for detecting position information  
on the display means where the display data is to be  
displayed;

discrimination means for discriminating based on  
5 the detected position information if the display data is  
active; and

luminance control means for lowering the luminance  
of the display data when the discrimination means  
determines that the display data is not active.

10 In order to achieve the above object, a display  
device according to the present invention comprises the  
following arrangement.

That is, there is provided a display device  
capable of displaying a plurality of windows on a  
15 display screen, comprising:

input means for inputting display data;

first storage means for storing the input display  
data;

20 second storage means for storing the display data  
output from the first storage means;

display means for displaying the display data  
stored in the second storage means at a predetermined  
luminance;

detection means for detecting position information  
25 on the display means where the display data is to be  
displayed;

discrimination means for discriminating based on the detected position information if the display data is active; and

luminance inversion means for inverting the  
5 luminance of the display data when the discrimination means determines that the display data is not active.

In order to achieve the above object, a display control method for a display device according to the present invention comprises the following arrangement.

10 That is, there is provided a display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

the input step of inputting display data;

the first storage step of storing the input  
15 display data in first storage means;

the second storage step of storing the display data output from the first storage means in second storage means;

the display step of displaying on display means  
20 the display data stored in the second storage means at a predetermined luminance;

the detection step of detecting position information on the display means where the display data is to be displayed; and



the discrimination step of discriminating based on the detected position information if the display data is active,

wherein the luminance of the display data is  
5 lowered when it is determined that the display data is not active.

In order to achieve the above object, a display control method for a display device according to the present invention comprises the following arrangement.

10 That is, there is provided a display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

the input step of inputting display data;

the first storage step of storing the input  
15 display data in first storage means;

the second storage step of storing the display data output from the first storage means in second storage means;

the display step of displaying on display means  
20 the display data stored in the second storage means at a predetermined luminance;

the detection step of detecting position information on the display means where the display data is to be displayed; and

the discrimination step of discriminating based on the detected position information if the display data is active,

wherein the luminance of the display data is  
5 inverted when it is determined that the display data is not active.

In order to achieve the above object, a storage medium according to the present invention comprises the following arrangement.

10 That is, there is provided a storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, the program  
15 comprising:

the input step of inputting display data;  
the first storage step of storing the input display data in first storage means;  
the second storage step of storing the display  
20 data output from the first storage means in second storage means;  
the display step of displaying on display means the display data stored in the second storage means at a predetermined luminance;

the detection step of detecting position information on the display means where the display data is to be displayed; and

the discrimination step of discriminating based on  
5 the detected position information if the display data is active,

wherein the luminance of the display data is lowered when it is determined that the display data is not active.

10 In order to achieve the above object, a display device according to the present invention comprises the following arrangement.

That is, there is provided a storage medium which stores a program that pertains to display control in a  
15 format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, the program comprising:

the input step of inputting display data;  
20 the first storage step of storing the input display data in first storage means;

the second storage step of storing the display data output from the first storage means in second storage means;

the display step of displaying on display means  
the display data stored in the second storage means at a  
predetermined luminance;

the detection step of detecting position  
5 information on the display means where the display data  
is to be displayed; and

the discrimination step of discriminating based on  
the detected position information if the display data is  
active,

10 wherein the luminance of the display data is  
inverted when it is determined that the display data is  
not active.

In order to achieve the above object, a display  
device according to the present invention comprises the  
15 following arrangement.

That is, there is provided a display device  
capable of displaying a plurality of windows on a  
display screen, comprising:

connection means for connecting a plurality of  
20 types of input devices;

discrimination means for discriminating if image  
data input from each of the input devices connected to  
the connection means is image data to be displayed in an  
active window;

25 input control means for controlling an input  
timing of image data input from each of the input

devices connected to the connection means on the basis of a discrimination result of the discrimination means;

image processing means for performing an image process of image data input from the input control

5 means; and

display means for displaying image data that has undergone the image process in the image processing means.

In order to achieve the above object, a display control method for a display device according to the present invention comprises the following arrangement.

That is, there is provided a display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

15 the discrimination step of discriminating if image data input from each of a plurality of types of input devices is image data to be displayed in an active window;

the input control step of controlling an input timing of image data input from each of the input devices on the basis of a discrimination result in the discrimination step;

the image processing step of performing an image process of image data input from the input control step;

25 and

the display step of displaying image data that has undergone the image process in the image processing step.

In order to achieve the above object, a storage medium according to the present invention comprises the following arrangement.

That is, there is provided a storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, the program comprising:

the discrimination step of discriminating if image data input from each of a plurality of types of input devices is image data to be displayed in an active window;

the input control step of controlling an input timing of image data input from each of the input devices on the basis of a discrimination result in the discrimination step;

the image processing step of performing an image process of image data input from the input control step; and

the display step of displaying image data that has undergone the image process in the image processing step.

Other features and advantages of the present invention will be apparent from the following description

taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

5 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an explanatory view showing the display state on the display screen of a conventional display device;

Fig. 2 is an explanatory view showing the display state on the display screen of a display according to the first embodiment of the present invention;

Fig. 3 is a block diagram showing the arrangement of an information processing system which can implement display control according to the first embodiment shown in Fig. 2;

Fig. 4 is a flow chart showing a display control sequence executed in the first embodiment;

Fig. 5 is a block diagram showing the arrangement of an information processing system according to the second embodiment of the present invention;

Fig. 6 is a flow chart showing a display control sequence executed in the second embodiment;

Fig. 7 is a block diagram showing the arrangement of an information processing apparatus according to the third embodiment of the present invention;

Fig. 8 is a block diagram showing the detailed arrangement of a graphic controller of the third embodiment;

Fig. 9 is a view showing the display screen of a display of the third embodiment;

Fig. 10 is a flow chart showing the processing flow of a process executed in the third embodiment;

Fig. 11 is a block diagram showing the detailed arrangement of a graphic controller according to the fourth embodiment of the present invention;

Fig. 12 is a block diagram showing the detailed arrangement of a graphic controller according to the sixth embodiment of the present invention; and

Fig. 13 is a flow chart showing the processing flow of a process executed in the sixth embodiment.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described hereinafter with reference to the accompanying drawings.

##### (First Embodiment)

The first embodiment of the present invention will be described below with reference to Figs. 1 to 4.

Fig. 1 is an explanatory view showing the display state on the display screen of a conventional display device. Referring to Fig. 1, four windows A, B, C, and D



are displayed on the display screen. Windows A, B, C, and D have the same window size. As shown in Fig. 1, since windows A, B, C, and D are displayed at an identical luminance on the conventional display device,  
5 it is hard to visually confirm the window which is currently active.

Fig. 2 shows the display state on the display screen of a display of the first embodiment.

Referring to Fig. 2, four windows A, B, C, and D are  
10 displayed on the display screen, as in Fig. 1. Of the four windows displayed on the display screen, window A is active, and other windows, i.e., windows B, C, and D are inactive. In the first embodiment, image displayed in the inactive windows are displayed at a lower luminance than  
15 image displayed in the active window.

Fig. 3 is a block diagram showing the arrangement of an information processing system which can implement display control according to the first embodiment shown in Fig. 2.

20 Referring to Fig. 3, an information processing system includes an input unit 1 for receiving display data and the like sent from a host computer (not shown), a first storage unit 2 for storing input display data in units of lines, a second storage unit 3 as a frame  
25 memory for storing in units of frames display data transferred from the first storage unit 2 in units of

lines, a luminance conversion circuit 4 for controlling the luminance of display data, a central processing unit (MPU) 5 having a function of managing and controlling the entire information processing system, and a display 5 6 having a resolution of 3,200 dots  $\times$  2,400 dots or more.

The input unit 1 converts, e.g., serial data input at high speed from the host computer or the like into parallel data.

Display data processed by the input unit 1 is sent 10 to the first storage unit 2 via a signal line L1. The first storage unit 2 is a memory for storing display data processed by the input unit 1 in units of lines, as described above, and sequentially transfers display data to the second storage unit 3 via a signal line L2 under 15 the control of a control signal sent from the MPU 5 via a control line L4. The display data stored in the second storage unit 3 is transferred to the luminance conversion circuit 4 via a signal line L3 under the control of a control signal sent from the MPU 5 via the 20 control line L4.

The MPU 5 recognizes a window which is currently being accessed, and its window size and physical position. Hence, the MPU 5 checks based on the physical position information of the window if display data which 25 is being currently processed by the luminance conversion circuit 4 is active. If the display data is inactive,

the MPU 5 executes a process for lowering the luminance level. For example, when display data read out from the second storage unit 3 has a luminance level value = 64, and corresponds to an inactive window, the luminance conversion circuit 4 controls the luminance level value of that display data to be 32. In this manner, the display data to be displayed on the display 6 is luminance-converted, and is displayed on the display 6 via a signal line L5.

10 Assume that the luminance level value of display data read out from the second storage unit 3 is pre-stored in, e.g., the second storage unit 3.

Fig. 4 is a flow chart showing the display control sequence executed in the first embodiment.

15 When display data is input to the input unit 1, the input unit 1 performs a data sequence conversion process of that display data, and also power supply voltage conversion (step S1). In this data sequence conversion process, display data input as RGB data from  
20 the input unit 1 is serial-to-parallel converted into 8-bit data. Power supply voltage conversion is implemented by a conversion unit (not shown) for converting a voltage (e.g., 5 V) from the host computer side into 3.3 V.

25 The display data processed by the input unit 1 is transferred to and stored in the first storage unit 2

via the signal line L1 (step S2). The display data stored in the first storage unit 2 is sequentially transferred to and stored in the second storage unit 3 as a frame memory via the signal line L2 in units of  
5 lines under the control of the MPU 5 via the control line L4 (step S3).

The MPU 5 then checks if the display data transferred from the second storage unit 3 to the luminance conversion circuit 4 via the signal line L3 is  
10 active data to be displayed on an active window or inactive data (step S4). If it is determined that the display data is active data, the MPU 5 reads out a luminance level value of that display data, and controls  
15 to display the display data on the display screen to have a luminance which corresponds to the readout luminance level value (step S5).

On the other hand, if it is determined in step S4 that the display data is inactive data, the MPU 5 reads out the luminance level value of that display data (step  
20 S6), and multiplies the readout luminance level value by 1/2 (step S7). Also, the MPU 5 drops the digits after the decimal point of the value obtained in step S7 (step S8). The flow then advances to step S5, and the display data is displayed on the display screen using the  
25 obtained luminance level value.

As described above, according to the first embodiment, even when a plurality of windows (display data) are displayed on a single screen, the active window which is currently being accessed is displayed on the display screen using the luminance level value determined for that window, and each inactive window which is not being accessed is displayed on the display screen using a value obtained by multiplying the predetermined luminance level value for that window by 1/2. Hence, the user of the display device can adequately recognize the window he or she is currently accessing.

(Second Embodiment)

The second embodiment of the present invention will be described below with reference to Figs. 5 and 6.

Fig. 5 is a block diagram showing the arrangement of an information processing system of the second embodiment.

The second embodiment is different from the first embodiment described in above in that an inversion circuit 7 is used in place of the luminance conversion circuit 4 shown in Fig. 3. Other building components and functions are the same as those shown in Fig. 3 in the first embodiment. The inversion circuit 7 has a function of inverting the luminance level value set for display data to be displayed on an inactive window by the MPU 5.

For example, when display data read out from the second storage unit 3 is 8-bit data and the luminance level value is "64", that luminance level value can be expressed by "01000000" in binary notation. When this value is input to the inversion circuit 7, "64" (decimal notation) is subtracted from "255" (decimal notation). As a result, a value "191" (decimal notation), i.e., "10111111" (binary notation), is obtained. The inversion circuit 7 inverts display data to be displayed on the display screen using the obtained value, and sends it to the display 6.

Fig. 6 is a flow chart showing the display control sequence executed in the second embodiment.

In Fig. 6, the processes in steps S1 to S5 are the same as those shown in Fig. 4 in the first embodiment.

If the MPU 5 determines that the display data transferred from the second storage unit 3 to the inversion circuit 7 via the signal line L3 is inactive data, it reads out the luminance level value of that display data (step S6). The readout luminance level value is inverted by the aforementioned computation (step S11). The flow then advances to step S5, and the display data is displayed on the display screen using the obtained luminance level value.

As described above, according to the second embodiment, when a plurality of windows (display data)

are displayed on a single screen, an active window which is currently being accessed is displayed on the display screen using a luminance level value determined for that window, and inactive windows which are not being

5 accessed are displayed on the display screen using a value obtained by inverting the luminance level value determined for the active window. Hence, the user of the display device can adequately recognize the window he or she is currently accessing.

10 In the first and second embodiments described above, whether input display data is active or inactive may be determined as follows. For example, a pointing device such as a mouse is adopted, a position pointed by a cursor that moves on the display screen in accordance  
15 with operation of the pointing device is detected by the MPU 5, and the window located at the detected position is determined to be active.

Such arrangement can be realized by, e.g., that shown in the block diagram in Fig. 3 of the first  
20 embodiment. In this case, display data to be input to the luminance conversion circuit 4 (display data output from the second storage unit 3 via the signal line L3) is monitored by the MPU 5, and if the cursor is present on a window on which the display data transferred from  
25 the signal line L3 to the luminance conversion circuit 4 is displayed, it is determined that the display data is

active; otherwise, it is determined that the display data is inactive. Such active/inactive determination method may be implemented by the arrangement shown in Fig. 5 in the second embodiment. In this case, the same determination is made for display data to be input to the inversion circuit 7 in place of the luminance conversion circuit 4.

(Third Embodiment)

Fig. 7 is a block diagram showing the arrangement of an information processing system according to the third embodiment.

Reference numeral 101 denotes a first host computer (PC1) which can output analog data, and incorporates a CPU, RAM, ROM, and the like (none of them are shown). Reference numeral 102 denotes a VHF tuner for receiving a terrestrial broadcast. Reference numeral 103 denotes a video signal output device for outputting a video signal. Reference numeral 104 denotes a CS tuner for receiving an SD (Standard Definition) satellite broadcast. Reference numeral 105 denotes a second host computer (PC2) which can output digital data, and incorporates a CPU, RAM, ROM, and the like (none of them are shown) as in the first host computer 101. Reference numeral 106 denotes a graphic controller for receiving signals from the individual devices connected thereto. Reference numeral 107 denotes a display which comprises



a CRT, LCD, or the like, and displays an image on the basis of image data output from the graphic controller 106.

The first host computer 101 is connected to the  
5 graphic controller 106 via a signal line L1, and outputs analog data to the graphic controller 106 via the signal line L1. Likewise, the VHF tuner 102, video signal output device 103, CS tuner 104, and second host  
10 computer 105 respectively output the received terrestrial broadcast, video signal, received satellite broadcast, and digital data to the graphic controller 106 via signal lines L2, L3, L4, and L5.

The graphic controller 106 processes these  
plurality of types of input image data to optimal image  
15 data, and displays the processed image data on the display 107 via a signal line L6. The display 107 is capable of displaying an image having a resolution of 3,200 dots x 2,400 dots or more. The display 107 has, as a display pattern, a multi-window display function, i.e.,  
20 can select one of a plurality of input data and display the selected data on a full screen, or can select a plurality of data and display them on a plurality of windows such as two or four windows.

For example, only image data from the first host  
25 computer 101 can be displayed on the display 107 via the graphic controller 106. Also, the satellite broadcast

received by the CS tuner 104 and image data from the first host computer 101 are input to the graphic controller 106, and images corresponding to these image data can be displayed on two windows on the display 107.

5       The detailed arrangement of the graphic controller 106 of the third embodiment will be described below using Fig. 8.

Fig. 8 is a block diagram showing the detailed arrangement of the graphic controller of the third  
10   embodiment.

Image data (e.g., analog RGB, resolution = XGA (1,024 × 768), frequency = 65 MHz) output from the first host computer 101 is connected to an input controller 20 via the signal line L1. The input controller 20 also  
15   serves as a control circuit for restricting capture of image data and controlling peripheral circuits under the control of a microcomputer (MPU) 21.

If a signal line L21 changes from logic "1" to logic "0" by a control signal from the MPU 21, a down  
20   counter 22 decrements a predetermined value (e.g., 1 sec) in unitary decrements, and informs the MPU 21 of a borrow signal via a signal line L22 every time it is generated. In response to this signal, the MPU 21 determines input data to be controlled, and controls the  
25   determined data via a signal line L23.

A trigger that directly controls the MPU 21 is input as a command from the second host computer 105 via a signal line (not shown) independently of the signal line L5 in accordance with an instruction from a remote controller.

Image data input to the input controller 20 via the signal line L1 is under the control of the MPU 21. The input controller 20 is comprised of an analog switch or a high-speed switching element, and the like.

Image data that has passed through the input controller 20 is input to an analog-to-digital converter (A/D converter) 23 via a signal line L201. In this case, since the input image data is an analog signal, it is converted into a digital signal. The converted digital signal is connected to an image processor 28 via a signal line L211.

The image processor 28 stores the received digital signal in an image memory 28a under the control of the MPU 21 (via a signal line not shown). The stored digital signal undergoes resolution conversion such as upscaling, downscaling, or the like in correspondence with the screen size and display window size of the display 107, and is output to a switching controller 29 via a signal line L216.

Likewise, image data from the VHF tuner 102 is sent to the input controller 20 via the signal line L2,

and is output onto a signal line L202 via the input controller 20.

Next, the image data is converted by an analog-to-digital converter (A/D converter) 24 from an analog signal into a digital signal in the same manner as the aforementioned data, and the digital signal is output to the image processor 28 via a signal line L212. The digital signal is stored in the image memory 28a, and undergoes resolution conversion as needed. The resolution-converted digital signal is output to the switching controller 29 via a signal line L217 in the same manner as the aforementioned data.

Image data (video signal) from the video signal output device 103 is input to the input controller 20 via the signal line L3, and is output onto a signal line L203 via the input controller 20.

The video signal input to a video decoder 25 via the signal line L203 undergoes format conversion, and is sent to the image processor 28 via a signal line L213. The image processor 28 stores the video signal in the image memory 28a in the same manner as the aforementioned data, and executes an image process (e.g., a scaling function such as upscaling, downscaling, or the like) as needed. Then, the video signal is output to the switching controller 29 via a signal line L218.

A satellite broadcast (digital image data) that has undergone a digital signal process in the CS tuner 104 is input to the input controller 20 via the signal line L4, and is output onto a signal line L204 via the input controller 20. The digital image data input to a format conversion circuit 26 undergoes a conversion process since its signal level is digital and LVDS (Low Voltage Differential Signaling). After that, the image data output to the image processor 28 via a signal line L214 is stored in the image memory 28a, and undergoes an image process such as resolution conversion or the like as needed. The image data that has undergone the image process is output to the switching controller 29 via a signal line L219.

Image data output from the second host computer 105 is input to the input controller 20 via the signal line L5, and is output onto a signal line L205 via the input controller 20. Note that the signal level on the signal line L205 is TMDS (Transition Minimized Differential Signaling) in this embodiment. This is a digital standard for transferring a digital signal.

The digital image data input to a format conversion circuit 27 via the signal line 205 undergoes a conversion process since its signal level is digital. The image data output to the image processor 28 via the signal line L215 is stored in the image memory 28a, and

undergoes an image process such as resolution conversion or the like as needed. The image data that has undergone the image process is output to the switching controller 29 via a signal line L220.

5           In this manner, image data output from the first host computer 101, VHF tuner 102, video signal output device 103, CS tuner 104, and second host computer 105 are connected to the switching controller 29 via the signal lines L1 to L5, input controller 20, and image  
10 processor 28.

          The switching controller 29 selectively extracts images from the plurality of input image data, and outputs them to an interface circuit (I/F) 30 via a signal line L221. Note that the MPU 21 recognizes a  
15 window which is currently being accessed, and its window size and physical position. Hence, the MPU 21 processes the input image data in correspondence with the display format of the display 107 in the interface circuit 30, and displays the data on the display 107 via the signal  
20 line L6.

          The display screen of the display 107 of the third embodiment will be explained below using Fig. 9.

          Fig. 9 shows the display screen of the display of the third embodiment.

25           In Fig. 9, four windows are displayed on the display 107. For example, a window 41 displays the image

output from the host computer 101, a window 42 displays  
a ground broadcast wave image from the VHF tuner 102, a  
window 43 displays an image played back by the video  
signal output device 103, and a window 44 displays a  
5 satellite broadcast wave video from the CS tuner 104.

Assume that the viewer selects the window 43 as a  
window he or she wants to see from the four windows in  
such display state. More specifically, the window that  
displays an image played back by the video signal output  
10 device 103 is the one he or she wants to review.

Means for selecting a window on the display 107,  
i.e., means for selecting an active window can easily  
realize selecting or the like of, e.g., a selection  
number button, cursor (not shown) on the remote  
15 controller.

In response to the selection, the MPU 21 activates  
the counter 22 via the signal line L21. The counter 22  
starts downcounting. An initial value is set in advance  
(e.g., a numerical value "1 sec" is set).

20 After that, the counter 22 decrements the initial  
value in unitary decrements, and when a borrow signal is  
generated, the counter 22 informs the MPU 21 of that  
result via the signal line L22. In response to that  
information, the MPU 21 open/close-controls signal gates  
25 on the individual signal lines input to the input  
controller 20. In this case, since the window 43 is the

one the user wants to see, the signal gate on the signal line L3 remains open.

When the counter 22 generates the next borrow signal on the signal line L22 as a decrement result, the  
5 input controller 20 opens the closed signal gates to capture images for one frame, and executes a process for capturing image data.

Upon completion of capturing of image data for one frame, the MPU 21 closes the signal gates in the graphic  
10 controller 20 via the signal line L23.

In this manner, every time the signal (borrow signal) output from the counter 22 on the signal line L22 changes (1-sec intervals), the gates in the input  
15 controller 20 are repeatedly opened/closed (except for the signal gate to which the image data of interest is input).

With this control, image data other than that the user wants to see are sampled, i.e., decimated at given intervals. In this manner, the viewer can visually  
20 confirm these input image data as still images although they are actually moving image data.

The processing flow of the process executed in the third embodiment will be explained below using Fig. 10.

Fig. 10 is a flow chart showing the processing  
25 flow of the process executed in the third embodiment.



Note that Fig. 10 shows the basic processing flow upon implementing the display state shown in Fig. 9 (four-window display).

The MPU 21 checks based on a viewer instruction if  
5 the multi-window function is to be activated (step S101). If the multi-window function is not to be executed (NO in step S101), the MPU 21 ends the process. On the other hand, if the multi-window function is to be executed (YES in step S101), the flow advances to step S102.

10 When the multi-window function is executed, the MPU 21 checks if all the multi-windows are displayed in real time, i.e., the presence/absence of a window to be set active (step S102). If all the multi-windows are displayed in real time, i.e., if there is no window to  
15 be set active (NO in step S102), the MPU 21 ends the process. On the other hand, if not all the multi-windows are displayed in real time, i.e., if there is a window to be set active (YES in step S102), the flow advances to step S103.

20 If there is a window to be set active, the MPU 21 determines which one of the windows is to be activated. The MPU 21 then sets a numerical value in the counter 22. In this case, the MPU 21 sets a binary value corresponding to 1 sec in an internal register of the  
25 counter 22 via the signal line L21 (step S103). Once the

numerical value is set, it is automatically reloaded in the counter 22 when a borrow signal is generated.

The MPU 21 then controls a gate control circuit in the input controller 20 (step S104). The MPU 21 executes  
5 control for enabling only image data, corresponding to the to-be-activated window, of input image data (signal lines L1 to L5) via the signal line L23. With this control, only the active window (e.g., only image data on the signal line L3 is enabled) is displayed in real  
10 time on the display 107.

Upon completion of the control, the MPU 21 decrements the counter 22 by 1 (step S105).

The MPU 21 checks if it receives a borrow signal generated by the counter 22 via the signal line L22  
15 (step S106). If no borrow signal is generated yet (NO in step S106), the flow returns to step S105. If a borrow signal is generated (YES in step S106), the flow advances to step S107, and the MPU 21 opens the signal gates of the input controller 20 via the signal line L23  
20 to capture input image data to be displayed on inactive windows (S107).

Upon completion of capture of image data to be displayed on the inactive windows for one frame, the MPU 21 closes the signal gates of the input controller 20  
25 (step S108). Note that the captured image data are stored in the image memory 28a in the image processor 28.

The MPU 21 sequentially reads out the image data to be displayed on the inactive windows from the image memory 28a in the image processor 28 (step S109). The MPU 21 displays the readout data on the display 107

5 (step S110).

As described above, according to the third embodiment, when a plurality of windows are displayed on the single display 107, since images in the inactive windows other than the active window of his or her

10 choice are frame-decimated and displayed, the viewer can look at the active window without being distracted to other unwanted information, and can effectively utilize the multi-window function.

(Fourth Embodiment)

15 In the fourth embodiment, a modification of the graphic controller 106 of the third embodiment will be explained. More specifically, in the graphic controller shown in Fig. 8 in the third embodiment, the counter value of the counter 22 is fixed at a predetermined

20 numerical value (1 sec). However, in the fourth embodiment, the viewer can set an arbitrary value in the counter 22.

Fig. 11 is a block diagram showing the detailed arrangement of the graphic controller of the fourth

25 embodiment.

As shown in Fig. 11, in the fourth embodiment, a signal line L25 that can communicate with the MPU 21 is added. This signal line L25 allows an external device to directly access the MPU 21, and a counter value can be  
5 input from a keyboard (not shown) connected to a terminal device, a remote controller (not shown), or the like.

As the input method, counter values to be set are displayed as OSD (on-screen display) on the display 107,  
10 and the viewer selects one of them to input an arbitrary counter value. That is, the counter value can be input by the same input method as that for setting the volume, color tone, luminance, contrast, and the like on a normal television.

15 The counter value set by the viewer is sent to the MPU 21 as a command via the signal line L25. Upon receiving this command, the MPU 21 sets the arbitrary counter value in the internal register (not shown) of the counter 22 via the signal line L21.

20 As described above, according to the fourth embodiment, since the frame decimation time of images in the inactive windows other than the active window the viewer would like to see can be arbitrarily changed, he or she can select an arbitrary frame decimation time  
25 according to the intended purpose, and can effectively use the multi-window function.

(Fifth Embodiment)

In the above embodiments, four windows are opened on the display 107, only the active window the viewer wants to see is displayed in real time, and the  
5 remaining inactive windows are frame-decimated to display still images even though they are actually moving images.

However, the present invention can select not only one window to be set active but also an arbitrary number  
10 of windows to be set active, like two or three windows. More specifically, windows to be displayed on the display 107 in real time and those to be frame-decimated can be arbitrarily selected.

(Sixth Embodiment)

15 In the third to fifth embodiments, images in the inactive windows other than the active window are frame-decimated and displayed to easily direct viewer's attention to the active window of his or her choice. The sixth embodiment will explain an arrangement for  
20 directing viewer's attention to the active window of his or her choice more easily by controlling the luminance levels of images in the inactive windows other than the active window in addition to the arrangement described in the third embodiment.

25 More specifically, in the sixth embodiment, images to be displayed in inactive ones of the four windows

displayed on the display screen in Fig. 2 in the first embodiment described above are frame-decimated in addition to setting lower luminance than the image in the active window.

5           The detailed arrangement of the graphic controller 106 of the sixth embodiment will be explained below using Fig. 12.

Fig. 12 is a block diagram showing the detailed arrangement of the graphic controller of the sixth  
10   embodiment.

Note that the same reference numerals denote the same building components as those in the detailed arrangement of the graphic controller 106 shown in Fig. 8 in the third embodiment, and a detailed  
15   description thereof will be omitted.

Referring to Fig. 12, the switching controller 29 is controlled by a control signal sent from the MPU 21 via a signal line L24, and outputs image data to a luminance conversion circuit 31 via the signal line L221.

20           The MPU 21 recognizes a window which is currently being accessed, and its window size and physical position. Hence, the MPU 21 checks based on the physical position information of the window if image data which is currently processed by the luminance conversion  
25   circuit 31 corresponds to an active window. If the image data corresponds to an inactive window, the MPU 21

lowers its luminance level. For example, when the input image data has a luminance level value = 64, and corresponds to an inactive window, the luminance conversion circuit 31 controls the luminance level value of that display data to be 32. In this manner, the image data to be displayed on the display 107 is luminance-converted, and is displayed on the display 107 via the signal line L6. Note that the luminance level value of image data is pre-stored in, e.g., the image memory 28a.

The processing flow of the process executed in the sixth embodiment will be explained below using Fig. 13.

Fig. 13 is a flow chart showing the processing flow of the process executed in the sixth embodiment.

Note that the same step numbers denote the same processes as those in the flow chart in Fig. 10 in the third embodiment, and a detailed description thereof will be omitted.

After the process in step S109, the MPU 21 reads out the luminance level value of image data (step S109a). The MPU 21 multiplies the readout luminance level value by  $1/2$  (step S109b). The MPU 21 drops the digits after the decimal point of the obtained value (step S109c). The MPU 21 sequentially reads out image data to be displayed on an inactive window using the obtained luminance level value from the image memory 28a in the

image processor 28, and displays that data on the display 107 (step S110a).

As described above, according to the sixth embodiment, when a plurality of windows are displayed on the single display 107, an image in an active window is displayed using the luminance level value determined for that window, and an image in each inactive window is displayed by multiplying the luminance level value determined for that window by 1/2 and frame-decimating data. Hence, the viewer of the display device can adequately recognize the window he or she is currently accessing.

Note that the present invention can be applied to even an information processing system which is either one of a standalone apparatus, a display system consisting of a plurality of devices, or a display system that executes processes via a network such as a LAN or the like, as long as the function of the present invention is implemented.

The objects of the present invention are also achieved by supplying a storage medium, which records a program code of a software program that can implement the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the program code stored in the storage medium by a computer (or a CPU or MPU) of the system or apparatus.



In this case, the program code itself read out from the storage medium implements the functions of the above-mentioned embodiments, and the storage medium which stores the program code constitutes the present invention.

As the storage medium for supplying the program code, for example, a floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, ROM, and the like may be used.

The functions of the above-mentioned embodiments may be implemented not only by executing the readout program code by the computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

Furthermore, the functions of the above-mentioned embodiments may be implemented by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit, which is inserted in or connected to the computer, after the program code read out from the storage medium is written in a memory of the extension board or unit.

When the present invention is applied to the storage medium, the storage medium stores program codes

corresponding to the flow charts shown in Figs. 4, 6, 10, and 13 described above.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A display device capable of displaying a plurality of windows on a display screen, comprising:

discrimination means for discriminating if image  
5 data to be displayed on each of the plurality of windows  
is image data to be displayed on an active window; and  
display control means for controlling display of  
image data to be displayed on each of the plurality of  
windows on the basis of a discrimination result of said  
10 discrimination means.

2. The device according to claim 1, wherein said  
display control means displays the image data to be  
displayed on the active window at a higher luminance  
than a luminance of image data to be displayed on an  
15 inactive window.

3. The device according to claim 1, wherein said  
display control means decimates and displays image data  
to be displayed on an inactive window other than the  
image data to be displayed on the active window.

20 4. The device according to claim 1, wherein said  
display control means displays the image data to be  
displayed on the active window at a higher luminance  
than a luminance of image data to be displayed on an  
inactive window, and decimates and displays the image  
25 data to be displayed on the inactive window.

5. A display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

the discrimination step of discriminating if image  
5 data to be displayed on each of the plurality of windows is image data to be displayed on an active window; and  
the display control step of controlling display of image data to be displayed on each of the plurality of windows on the basis of a discrimination result in the  
10 discrimination step.

6. The method according to claim 5, wherein the display control step includes the step of displaying the image data to be displayed on the active window at a higher luminance than a luminance of image data to be  
15 displayed on an inactive window.

7. The method according to claim 5, wherein the display control step includes the step of decimating and displaying image data to be displayed on an inactive window other than the image data to be displayed on the  
20 active window.

8. The method according to claim 5, wherein the display control step includes the step of displaying the image data to be displayed on the active window at a higher luminance than a luminance of image data to be  
25 displayed on an inactive window, and decimating and

displaying the image data to be displayed on the inactive window.

9. A storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, said program comprising:

the discrimination step of discriminating if image data to be displayed on each of the plurality of windows is image data to be displayed on an active window; and

the display control step of controlling display of image data to be displayed on each of the plurality of windows on the basis of a discrimination result in the discrimination step.

10. A display device capable of displaying a plurality of windows on a display screen, comprising:

input means for inputting display data;

first storage means for storing the input display data;

- second storage means for storing the display data output from said first storage means;

display means for displaying the display data stored in said second storage means at a predetermined luminance;

detection means for detecting position information on said display means where the display data is to be displayed;

discrimination means for discriminating based on  
5 the detected position information if the display data is active; and

luminance control means for lowering the luminance of the display data when said discrimination means determines that the display data is not active.

10 11. The device according to claim 10, wherein a pointing device is connected to said display device, and said display means can display a cursor which indicates an arbitrary position on said display means in accordance with operation of said pointing device, and

15 said discrimination means detects a position of the cursor on said display means, and discriminates based on the detected position of the cursor and the position information if the display data is active.

12. A display device capable of displaying a plurality  
20 of windows on a display screen, comprising:

input means for inputting display data;

first storage means for storing the input display data;

second storage means for storing the display data  
25 output from said first storage means;

display means for displaying the display data stored in said second storage means at a predetermined luminance;

detection means for detecting position information  
5 on said display means where the display data is to be displayed;

discrimination means for discriminating based on the detected position information if the display data is active; and

10 luminance inversion means for inverting the luminance of the display data when said discrimination means determines that the display data is not active.

13. The device according to claim 12, wherein a pointing device is connected to said display device, and  
15 said display means can display a cursor which indicates an arbitrary position on said display means in accordance with operation of said pointing device, and

said discrimination means detects a position of the cursor on said display means, and discriminates  
20 based on the detected position of the cursor and the position information if the display data is active.

14. A display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

25 the input step of inputting display data;

the first storage step of storing the input display data in first storage means;

the second storage step of storing the display data output from said first storage means in second

5 storage means;

the display step of displaying on display means the display data stored in said second storage means at a predetermined luminance;

10 the detection step of detecting position information on said display means where the display data is to be displayed; and

the discrimination step of discriminating based on the detected position information if the display data is active,

15 wherein the luminance of the display data is lowered when it is determined that the display data is not active.

15. The method according to claim 14, wherein a pointing device is connected to said display device, and  
20 said display means can display a cursor which indicates an arbitrary position on said display means in accordance with operation of said pointing device, and

upon discriminating if the display data is active, a position of the cursor on said display means is  
25 detected, and whether or not the display data is active



is discriminated based on the detected position of the cursor and the position information.

16. A display control method for a display device capable of displaying a plurality of windows on a

5 display screen, comprising:

the input step of inputting display data;

the first storage step of storing the input display data in first storage means;

10 the second storage step of storing the display data output from said first storage means in second storage means;

the display step of displaying on display means the display data stored in said second storage means at a predetermined luminance;

15 the detection step of detecting position information on said display means where the display data is to be displayed; and

the discrimination step of discriminating based on the detected position information if the display data is active,

20 wherein the luminance of the display data is inverted when it is determined that the display data is not active.

17. The method according to claim 16, wherein a pointing device is connected to said display device, and said display means can display a cursor which indicates

an arbitrary position on said display means in accordance with operation of said pointing device, and upon discriminating if the display data is active, a position of the cursor on said display means is detected, and whether or not the display data is active is discriminated based on the detected position of the cursor and the position information.

18. A storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, said program comprising:

the input step of inputting display data;  
the first storage step of storing the input display data in first storage means;  
the second storage step of storing the display data output from said first storage means in second storage means;  
the display step of displaying on display means the display data stored in said second storage means at a predetermined luminance;  
the detection step of detecting position information on said display means where the display data is to be displayed; and

the discrimination step of discriminating based on the detected position information if the display data is active,

wherein the luminance of the display data is  
5 lowered when it is determined that the display data is not active.

19. The medium according to claim 18, wherein the discrimination step includes the step of detecting a position of a cursor, which indicates an arbitrary  
10 position on said display means in accordance with operation of a pointing device connected to said display device, on said display means, and discriminating based on the detected position of the cursor and the position information if the display data is active.

15 20. A storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, said program comprising:

20 the input step of inputting display data;  
the first storage step of storing the input display data in first storage means;  
the second storage step of storing the display data output from said first storage means in second  
25 storage means;

the display step of displaying on display means  
the display data stored in said second storage means at  
a predetermined luminance;

the detection step of detecting position  
5 information on said display means where the display data  
is to be displayed; and

the discrimination step of discriminating based on  
the detected position information if the display data is  
active,

10 wherein the luminance of the display data is  
inverted when it is determined that the display data is  
not active.

21. The medium according to claim 20, wherein the  
discrimination step includes the step of detecting a  
15 position of a cursor, which indicates an arbitrary  
position on said display means in accordance with  
operation of a pointing device connected to said display  
device, on said display means, and discriminating based  
on the detected position of the cursor and the position  
20 information if the display data is active.

22. A display device capable of displaying a plurality  
of windows on a display screen, comprising:

connection means for connecting a plurality of  
types of input devices;

25 discrimination means for discriminating if image  
data input from each of the input devices connected to

said connection means is image data to be displayed in an active window;

input control means for controlling an input timing of image data input from each of the input

- 5 devices connected to said connection means on the basis of a discrimination result of said discrimination means;

image processing means for performing an image process of image data input from said input control means; and

- 10 display means for displaying image data that has undergone the image process in said image processing means.

23. The device according to claim 22, wherein the input timing is a predetermined timing.

- 15 24. The device according to claim 22, further comprising setting means for setting the input timing.

25. The device according to claim 22, wherein said image processing means comprises luminance control means for controlling a luminance of image data input from

- 20 said input control means.

26. A display control method for a display device capable of displaying a plurality of windows on a display screen, comprising:

- the discrimination step of discriminating if image  
25 data input from each of a plurality of types of input

devices is image data to be displayed in an active window;

the input control step of controlling an input timing of image data input from each of the input

5 devices on the basis of a discrimination result in the discrimination step;

the image processing step of performing an image process of image data input from the input control step; and

10 the display step of displaying image data that has undergone the image process in the image processing step.

27. The method according to claim 26, wherein the input timing is a predetermined timing.

28. The method according to claim 26, further  
15 comprising the setting step of setting the input timing.

29. The method according to claim 26, wherein the image processing step includes the luminance control step of controlling a luminance of image data input from the input control step.

20 30. A storage medium which stores a program that pertains to display control in a format readable by a computer which is connected to or incorporates a display device capable of displaying a plurality of windows on a display screen, said program comprising:

25 the discrimination step of discriminating if image data input from each of a plurality of types of input

devices is image data to be displayed in an active window;

the input control step of controlling an input timing of image data input from each of the input  
5 devices on the basis of a discrimination result in the discrimination step;

the image processing step of performing an image process of image data input from the input control step;  
and

10 the display step of displaying image data that has undergone the image process in the image processing step.

ABSTRACT OF THE DISCLOSURE

Four windows A, B, C, and D are displayed on the display screen. Of the four windows displayed on the display screen, an active window which is currently  
5 being accessed is A, and other windows, i.e., windows B, C, and D are inactive windows. The inactive windows are displayed at a lower luminance than the active window.



FIG. 1





FIG. 2



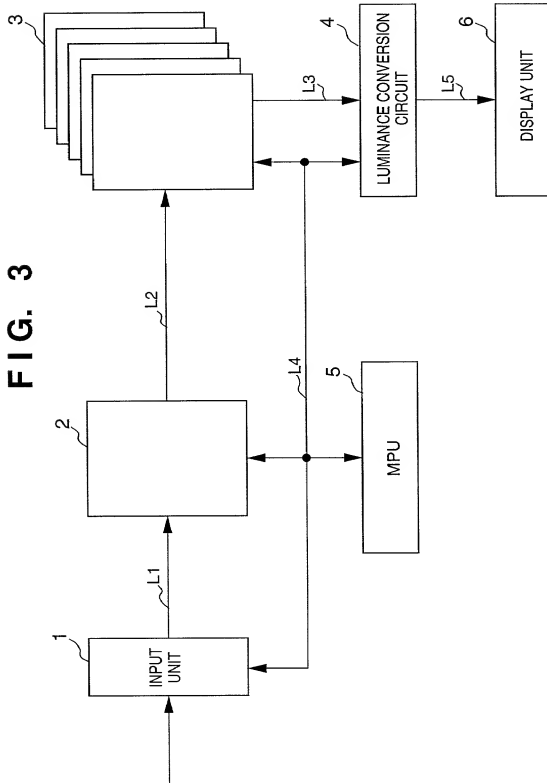
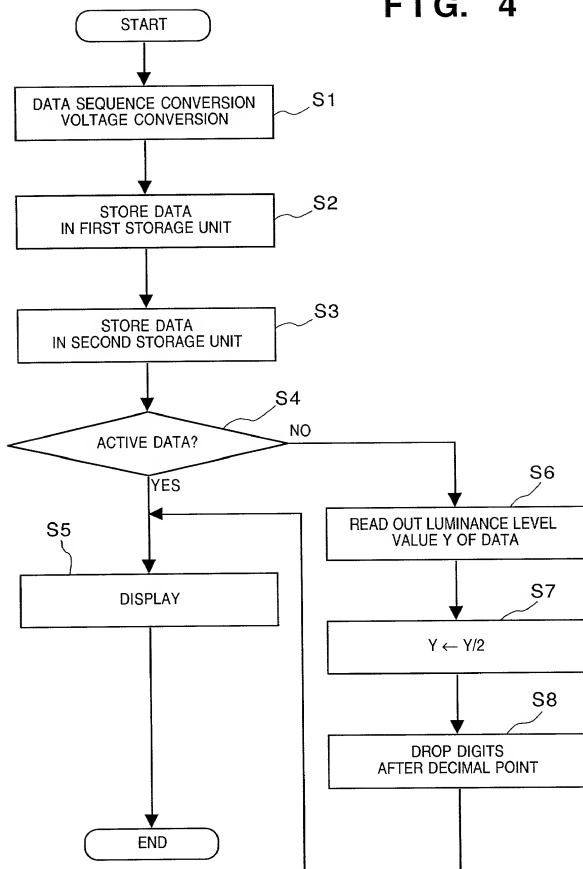


FIG. 4



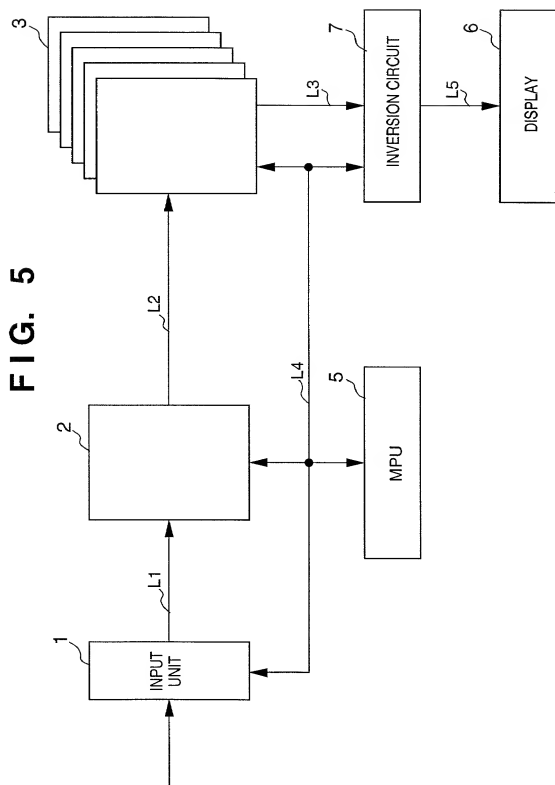


FIG. 6

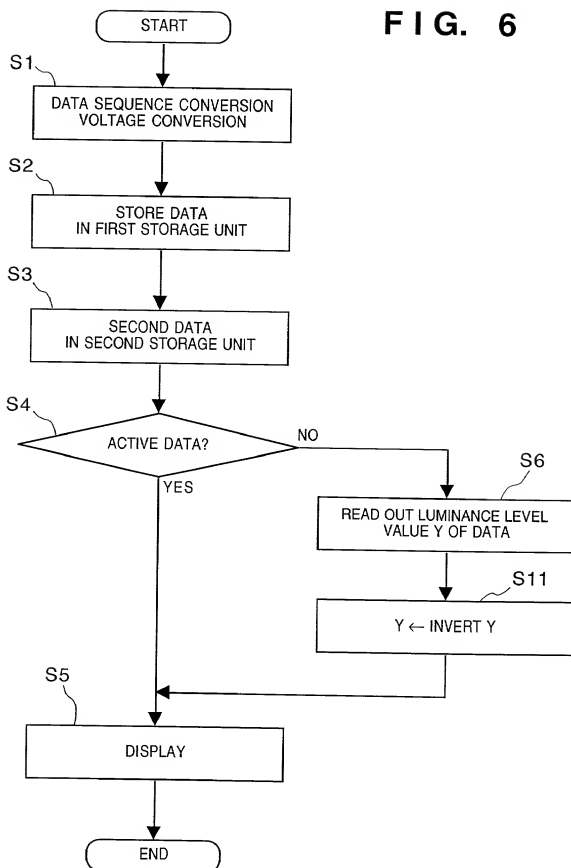


FIG. 7

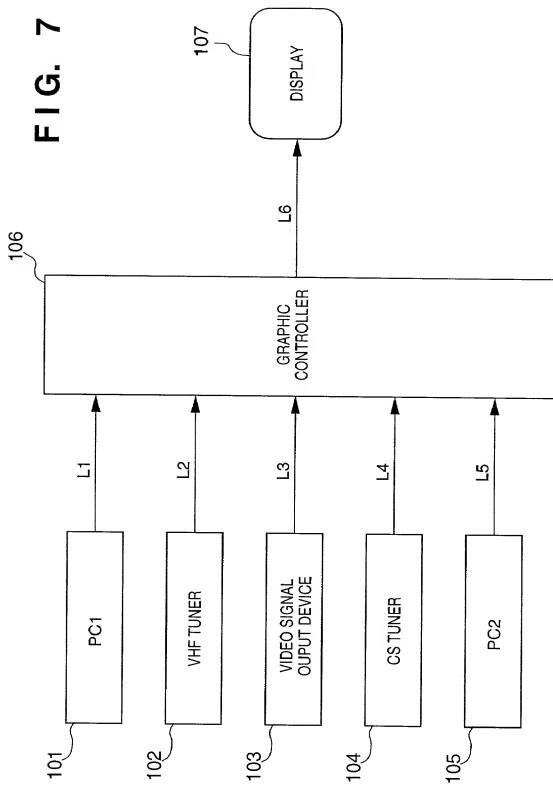
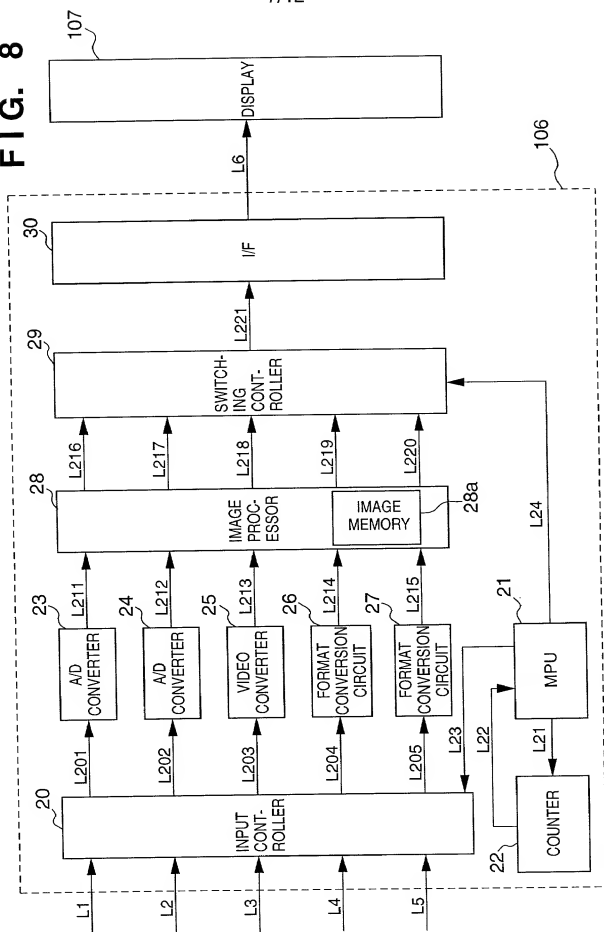


FIG. 8



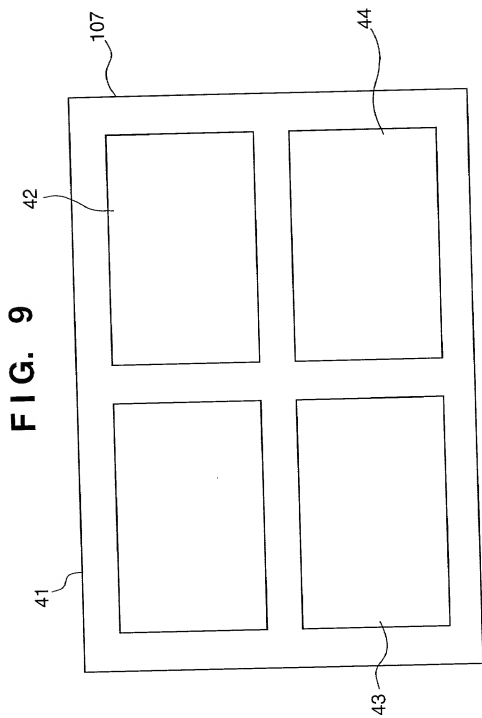




FIG. 10

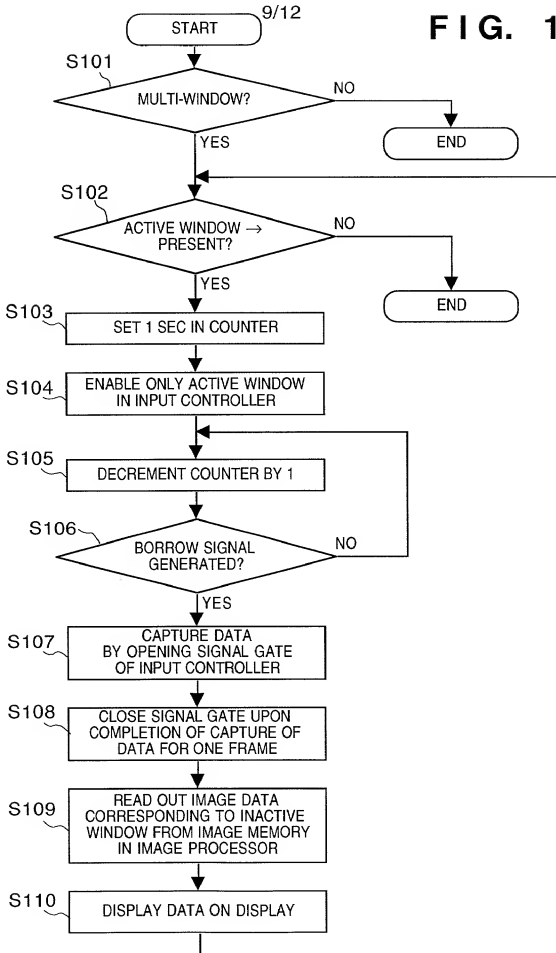


FIG. 11



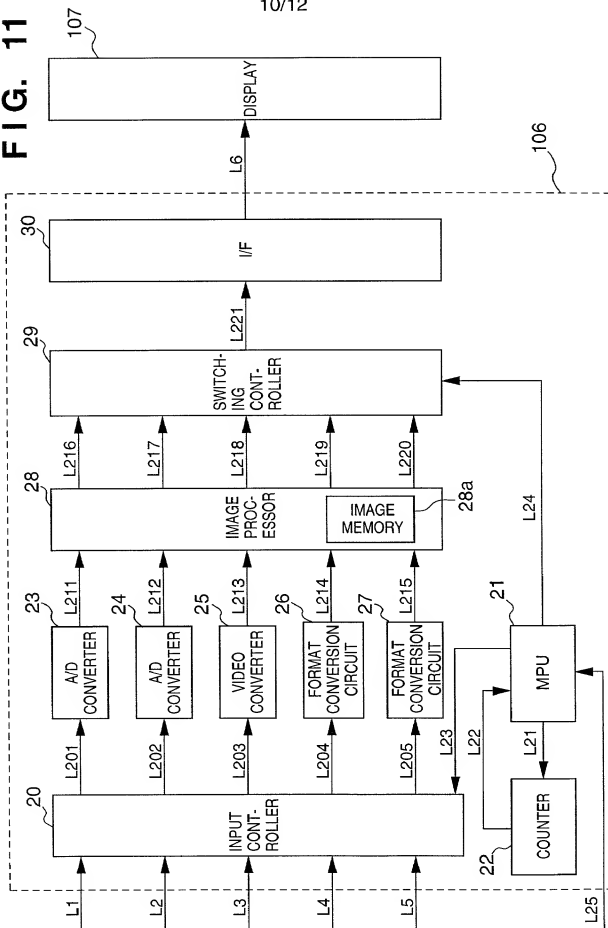


FIG. 12

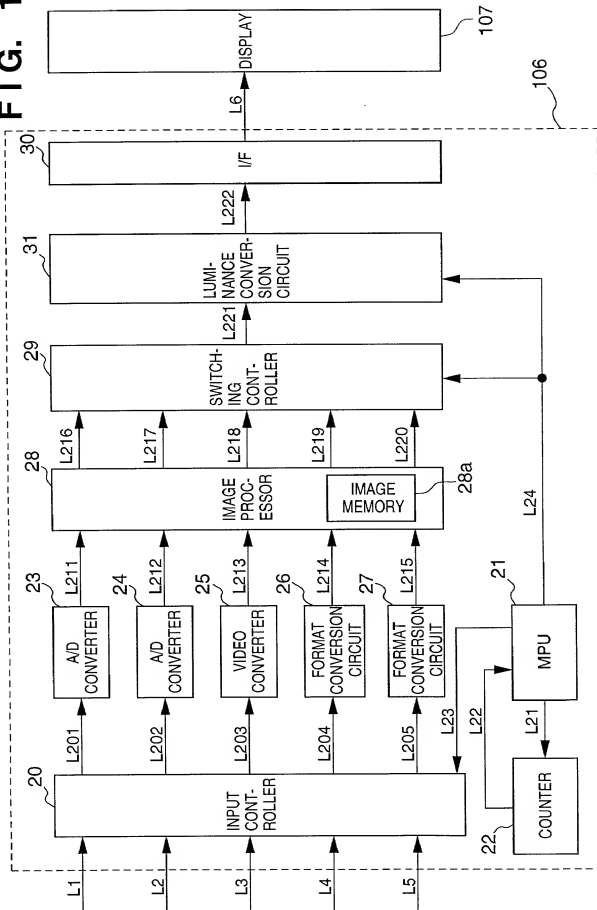

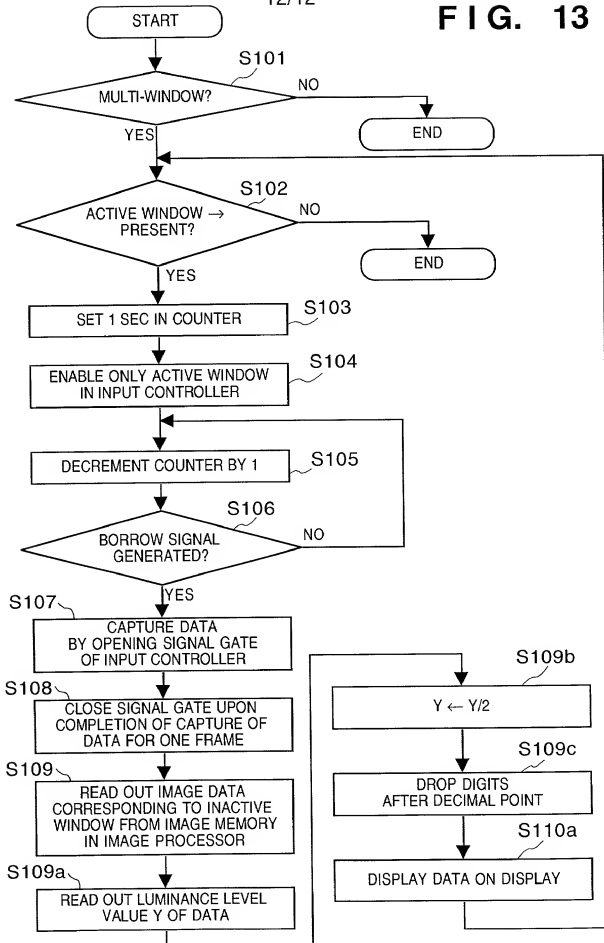

CFR 100.2-1  
24-10-1999

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DISPLAY DEVICE, DISPLAY CONTROL METHOD THEREOF, AND  
STORAGE MEDIUM

the specification of which [ ☒ ] is attached hereto. [ ☐ ] was filed on \_\_\_\_\_  
as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	10-375059	14/12/1998	Yes
JAPAN	11-299705	21/10/1999	Yes

I hereby appoint the practitioners associated with the firm and customer number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Takashi TSUNODA  
Inventor's signature Takashi Tsunoda  
Date 7. Dec. 1999 Citizen/Subject of Japan  
Residence 39-21, Umegaoka, Aoba-ku, Yokohama-shi,  
Kanagawa-ken, Japan  
Post Office Address c/o CANON KABUSHIKI KAISHA,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan